


EVOX

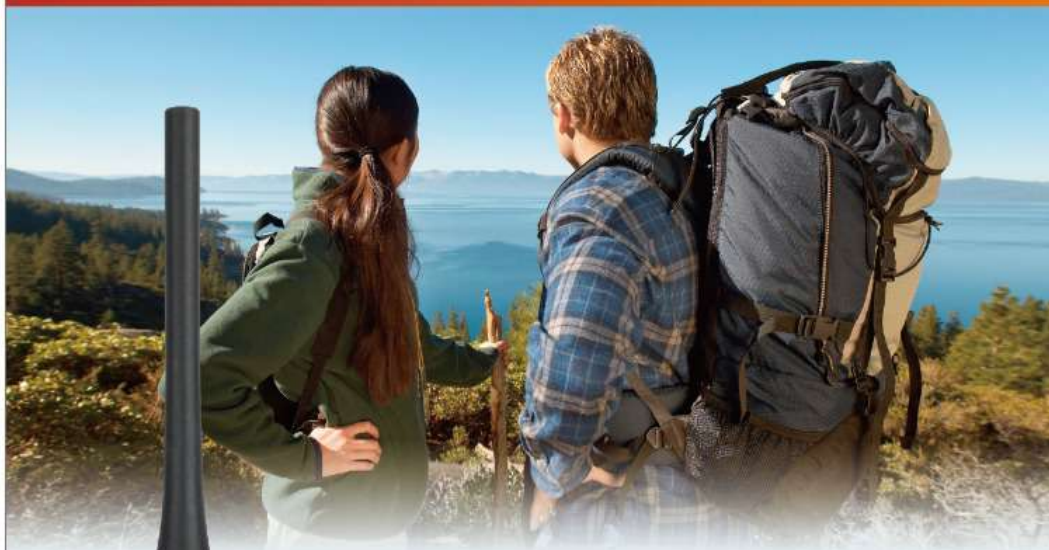

X1 Ultra

WALKIE TALKIE

- License free PMR446
- IP68 waterproof dust proof
- One Key Frequency Copy
- Noise Cancellation
- 200 Channels
- Multi Charger way: desk charger / Type C
- 2 Tone / 5 Tone
- Torching Function



X1 Ultra

WALKIE TALKIE



Main function

- DOT-MATRIX LCD DISPLAY
- Power-on mode select able
- DTMF calling channels quick assignment
- Wide / Mid / narrow bandwidth selectable
- 200 channels
- Dual band, dual wait, dual standby,
- Busy channel lock
- Scan: frequency and CTCSS scan
- TOT
- ANI
- Remote stun/ kill/ activate
- PTT ID
- FM radio for 24 channels storage
- VOX
- Battery saving
- Scrambler
- Multiple types for keys lock setting
- Multi-Display mode
- DTMF
- Backlight brightness setting
- COMP
- 1750Hz tone
- 2 Tone/5 Tone
- CTCSS/DCS

Technical

General

Channel storage: 200
Voltage: 7.4VDC
Working Temperature: $-10^{\circ}\text{C} \sim +50^{\circ}\text{C}$
weight: 295g (includes antenna and battery)
Dimension: 126x62x43mm

Receiver

Frequency: PMR446MHz
Sensitivity : $\leq 0.2 \mu\text{V}$
Occupied Bandwidth : $\leq 16\text{KHz}$
Selectivity : $\geq 65\text{dB}$
Intermediation: $\geq 55\text{dB}$
Audio power : $> 500\text{mW}$
Audio distortion : $\leq 10\%$
Frequency Stability: 5ppm
Current: standby: 60mA working: 250mA
Audio response (300-3400Hz) : $+7 \sim -12.5\text{dB}$

Transmitter

Frequency: PMR446MHz
Power: 0.5W
Modulation Type: FM
Spurious Power: $\leq -15\text{dB}$
Modulation Noise: $< -40\text{dB}$
Modulation Distortion : $< 5\%$
Frequency Stability: 5ppm
Max Fr. Deviation: $\leq \pm 5\text{KHz}$
Current: $\leq 1600\text{mA}$
Audio response (300-3400Hz) : $+6.5 \sim -14\text{dB}$

Standard Accessories



EVOX

website: www.evovindia.in